

TUĞRA

TGR 4340 (8X4) DXD
CONSTRUCTION TRUCK



BMC

TURQUALITY®

CABIN

TYPE

Day Cab

CAB SUSPENSION

Mechanic

ENGINE

BRAND / MODEL

Cummins ISL9E6D (Euro 6)

TYPE

Turbo Intercooler Diesel

NUMBER OF CYLINDERS

6

DISPLACEMENT

8.9 L

MAXIMUM POWER

400 PS (298 kW) @ 2100 rpm

MAXIMUM TORQUE

1700 Nm @ 1400 rpm

DIAMETER & STROKE

114 mm / 145 mm

TANKS

FUEL TANK CAPACITY

300 L

ADBLUE TANK CAPACITY

74 L

GEAR BOX

BRAND / MODEL

ZF 16S1830 TO (Manual) [S]

ZF 16S1831 TO (Manual+Intarder) [O]

NUMBER OF GEARS

16 Forward, 2 Reverse

GEAR RATIO

13.80:1 ; 0.84:1 (Reverse : 12.92:1 / 10.80:1)

CLUTCH

400 mm (15.5") [S]

430 mm (17") [O]

AXLES

FRONT AXLE

LOAD CAPACITY

9000 kg + 9000 kg

REAR AXLE

Gear Ratio

5.41:1

LOAD CAPACITY

16000 kg + 16000 kg

SUSPENSION

FRONT AXLE

Semi-elliptical Springs, Telescopic Shock Absorbers

REAR AXLE

Compensating Mechanism Semi-elliptical Springs, Telescopic Shock Absorbers

ANTI-ROLL BAR

Rear (4th) and Front (1st) Axles

TYRES

SIZE / NUMBER

315/80/R22,5 [S]

13R/R22,5 [O]

RIMS

SIZE

9 x 22.5

PERFORMANCE

TOP SPEED (LIMITED) (km/h)

90

TURNING RADIUS (m)

9.85

ELECTRICAL SYSTEM

VOLTAGE

24 V

BATTERIES

2 x 12 V / 180 Ah

ALTERNATOR

120 A

STARTER MOTOR

24 V

STEERING SYSTEM

TYPE

Hydraulic

BRAKE SYSTEM

BRAKE SYSTEM TYPE

Air Operated Dual Circuit Type

Ø410x200 Z-Cam Disc Brakes, EBS, ESC, AEBS, LDWS

RETARDER TYPE

Intarder (600 kW) [O]

ENGINE BRAKE

252 kW [S]

CHASSIS

CHASSIS PROFILE

Steel, 8mm+5mm (Reinforced)

STANDARD ACCESSORIES

Manually Operated Digital Air Conditioner (6 kW)

Radio/MP3/Bluetooth (1DIN)

2 USB + Cigarette Lighter (Driver Side)

2 USB + 12V (Passenger Side), 1 USB (Multimedia)

4 Points Independent Mechanic Cab Suspension

Cruise Control

Electrically Operated and Heated Side Mirrors

Adjustable Steering Column

Manually Operated Sunroof

Antilock Braking System (ABS)

Anti Slip Regulation (ASR)

Immobilizer

Single Key with Remote Control and Central Locking

Differential Lock

Digital Tachograph

Electrically Operated Windows

Air Suspended Driver Seat

Adjustable Driver Seat Armrest

Seat Headrest

Seatbelt Sensor (Driver)

Driver and Passenger Sun Visor

Spare Wheel

Front Fog Lamps

Electrically Operated Headlight Leveling

Front Dust Protection

Transmission PTO

Lamp Under Hood

Lamp Under Cab

Tyre Inflation Valve

HeadLight Protection Bars

Body Structure Module

OPTIONAL ACCESSORIES

7" Multimedia Display

Driver Seat with Air Operated Back Support

Heated Driver Seat

Adjustable Passenger Seat Armrest [3]

Fleet Management System Socket and Module


Intarder (600 kW)

Electric Cab Lift

Tire Pressure Monitoring System

Single Type Clutch System

Engine PTO - REPTO

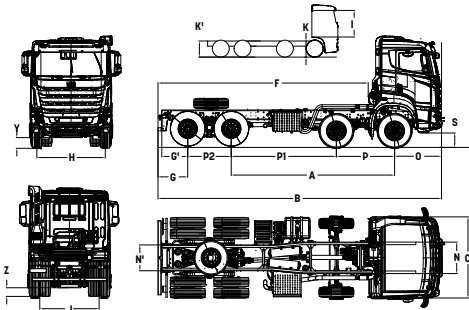

DIMENSIONS (mm)

A: Wheelbase	5050
B: Overall Length	8830
C: Overall Width (Excluding Mirrors)	2550
D: Overall Height	315/80/R 22,5: 3540 13R/22,5 : 3572
F: Useful Chassis Length	6515
I: Inner Height	1670 (Tunnel Height: 190)
O: Front Overhang	1500
G: Rear Overhang	810

H: Front Track	2120
J: Rear Track	1847
S: First Step Height	315/80/R22,5: 588 13R/22,5: 620
R: Inner Width	2155
K: Chassis Height	315/80/R22,5: 1175 13R/22,5: 1208
P: 1. and 2. Axle	1804
P1: 2. and 3. Axle	3246
P2: 3. and 4. Axle	1350

KERB WEIGHTS (kg)

WEIGHTS (kg)

MAXIMUM WEIGHT LOADED FRONT AXLE

MAXIMUM WEIGHT LOADED REAR AXLE

GROSS VEHICLE WEIGHT

TECHNICAL

8000+8000

13400+13400

42800

LEGAL

8000+8000

9500+9500

32000

1. AXLE	3222
2. AXLE	3847
3. AXLE	2100
4. AXLE	1899
TOTAL	11068*

*For kerb weight calculation, minimum equipment, no driver, 20 liters of fuel, 5 liters of urea included. Kerb weight may change depends on optional equipments.
Y322 Z274 (Loaded)
[O] Options [S] Standard

All visuals, dimensions, characteristics and equipment are for information purposes only they are not contractual. BMC reserves the right to modify them without prior warning (February 2021).

BMC OTOMOTİV SANAYİ VE TİCARET A.Ş.



Fabrika, Satış ve Pazarlama Kemalpaşa Caddesi No:288 Pınarbaşı 35060 Bornova / İZMİR TÜRKİYE



444 9 262



bmcugra.com